


product_datasheet_title

Vintage 1906 Big Globe 15 Filament 4W 818 Smoke E27

Vintage 1906® LED | LED lamps, vintage edition

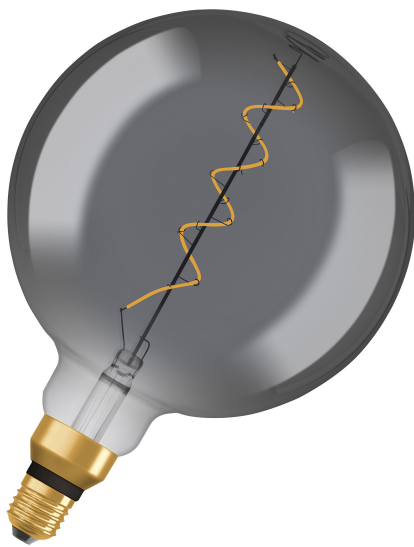


technical_data

ELECTRICAL DATA

Nominal wattage	4 W
Construction wattage	4.00 W
Nominal voltage	220...240 V
Operating mode	AC Mains
Claimed equiv. conventional lamp power	15 W
Nominal current	32 mA
Type of current	AC
Inrush current	1,5 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp number on MCB B10 A	400
Max. lamp number on MCB B16 A	480
Power factor λ	> 0.50

PHOTOMETRICAL DATA

Luminous flux	140 lm
Nominal useful luminous flux 90°	140 lm
Luminous efficacy	35 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm Comfort Light
Color temperature	1800 K
Color rendering index Ra	80
Light color	818
Standard deviation of color matching	≤6 sdcn
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	≤0.4

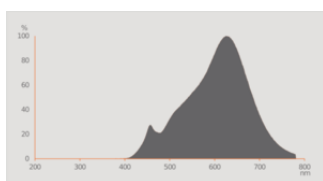

Everlight 67-23ST RKE 2700K

LIGHT TECHNICAL DATA

Beam angle	330 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s

DIMENSIONS & WEIGHT

Overall length	290.00 mm
Diameter	200.00 mm
Maximum diameter	200 mm
Product weight	275.00 g

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	65 °C

LIFESPAN

Lifespan L70/B50 at 25 °C	15000 h
Number of switching cycles	100000
Lumen maintenance at end of service lifetime	0.70
Rated lamp survival factor at 6,000 h	≥ 0.90

ADDITIONAL PRODUCT DATA

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Clear
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value / Filament-Spiral

CAPABILITIES

Dimmable	no
----------	----

CERTIFICATES & STANDARDS

Energy efficiency class	G ¹⁾
Energy consumption	4.00 kWh/1000h
Type of protection	IP20
Standards	CE / EAC
Photobiological safety group acc. to EN62778	RG1

¹⁾ This product is exempt from the EU Energy Labelling Regulation (EU Directive 2019/2015)

COUNTRY-SPECIFIC CATEGORIZATIONS
















Order reference	1906LEDBGLB 4W/
-----------------	-----------------









Energy labelling regulation data

Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E27
Connected light source (CLS)	no
Color-tuneable light source	no
Envelope	No
High luminance light source	no
Anti-glare shield	no
Correlated colour temperature type	SINGLE_VALUE
Standby power	0 W
Networked standby power for CLS	0 W
Claim of equivalent power	Yes
Length	290.00 mm
Height	200.00 mm
Width	200.00 mm
Chromaticity coordinate x	0.549
Chromaticity coordinate y	0.408
R9 Colour rendering index	0.00
Beam angle correspondence	SPHERE_360
Survival factor	0.90

Displacement factor	0.40
LED light source replaces a fluorescent light source	no
EPREL ID	523248
Model number	AC32474

download_data

	Documents and certificates	document_name
	On-Pack-Info	Exempt from ELR CZ
	On-Pack-Info	Exempt from ELR DE
	On-Pack-Info	ELR exempt DK
	On-Pack-Info	ELR exempt FIN
	On-Pack-Info	ELR exempt BG
	On-Pack-Info	ELR exempt ES
	On-Pack-Info	Exempt from ELR HU
	On-Pack-Info	Exempt from ELR SK
	On-Pack-Info	Exempt from ELR RUS
	On-Pack-Info	Exempt from ELR TR
	On-Pack-Info	Exempt from ELR S
	On-Pack-Info	Exempt from ELR GR
	On-Pack-Info	Exempt from ELR UA
	On-Pack-Info	Exempt from ELR RO
	On-Pack-Info	Exempt from ELR FR

Documents and certificates		document_name
	On-Pack-Info	Exempt from ELR HR
	On-Pack-Info	Exempt from ELR I
	On-Pack-Info	Exempt from ELR N
	On-Pack-Info	Exempt from ELR NL
	On-Pack-Info	Exempt from ELR P
	On-Pack-Info	Exempt from ELR PL
	Declarations Of Conformity CE	EC Declaration of Conformity Classic G lamp
Photometric and lighting design files		document_name
	Spectral power distribution	Everlight 67-23ST RKE 2700K

logistical_data

product_code	packaging_unit	dimensions	weight	volume
4058075269927	Folding box 1	225 mm x 225 mm x 356 mm	460.00 g	18.02 dm ³
4058075269934	Shipping box 4	474 mm x 474 mm x 388 mm	2855.00 g	87.17 dm ³

logistical_data_text

disclaimer_title

disclaimer_text